



UDUPI COCHIN SHIPYARD LIMITED

UDUPI COCHIN SHIPYARD LIMITED

Ministry of Ports, Shipping and Waterways,
Government of India

CONTRACT CELL DEPARTMENT

CORRIGENDUM - III

Tender No.: UCSL/CC/SER/T/CIVIL/121/2025

Date: 18-12-2025

Sir,


SUBJECT: RENEWAL OF RAINWATER GUTTER AT UCSL. HANGARAKATTE YARD.

A. The following changes have been made to the above-mentioned tender.

1. Description of work (Clause No:1) in Annexure-I

1.1. Renewal of the existing rainwater gutter system between Bay 2 & 3, CS Bay side and Bay 1 at UCSL, Hangarkatte Yard. The scope includes dismantling the existing gutter, fabricating and installing a new Galvalume gutter, and reconnecting the drainage system. Approximate length and dimension of gutter is as mentioned below.

Sl. No	Description	Qty	UOM
1	Between Bay 2&3 gutter renewal including sheet removal and refit and drain	100	Meter
2	CS Bay side 2&3 gutter renewal including sheet removal and refit and drain	140	Meter
3	Bay 4 flashing sheet renewal	28	Meter
4	Rate Supply of new sheet	150	Meter Square
5	Providing slope for existing 8-inch pipe between bay 2 & 3	1	Lump Sum

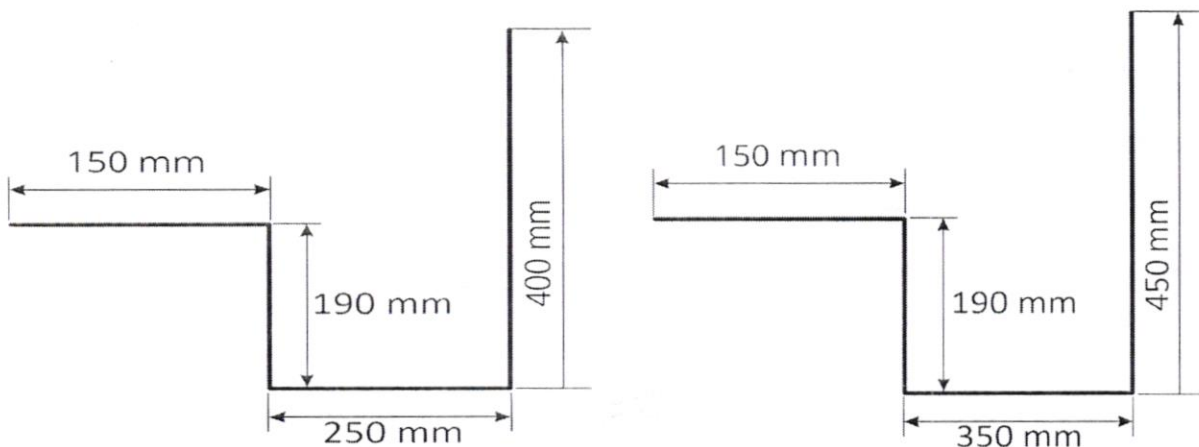

CS Bay Side

Between Bay 2 & 3

UDUPI COCHIN SHIPYARD LIMITED
HANGARAKATTE YARD
KARAKKAL, KERALA
INDIA



UDUPI COCHIN SHIPYARD LIMITED

Ministry of Ports, Shipping and Waterways,
Government of India

2. Following works have been added to the Scope of work, Under clause No: 5 in Annexure-I.

i. Clause No:5.1 in Dismantling

- Prior to dismantling the existing gutter, the vendor shall carry out a detailed inspection of the gutter and the associated roof area. Any damaged roof sheets identified during the inspection shall be reported to the UCSL In-charge. The vendor shall quote separate rate for the supply of roof sheets along with the tender. The cost for removal and refixation of roof sheets required for execution of the new gutter shall be included in the quoted rate for gutter renewal.
- Specification of new sheet to be supplied: Pre-coated galvalume sheets of trapezoidal 5-corrugation, 0.50 mm total coated thickness. The sheets shall have a protective.

ii. Clause No:5.2 in Fabrication & Installation

- Both ends of gutter shall be closed properly to prevent leakage and the other end of the gutter to be connected to the existing funnel arrangement for water drain.
- The gutter shall be provided with the required slope, as per site conditions, to ensure smooth flow of rainwater and to prevent water stagnation.

iii. Clause No:5.3 in Drain Arrangement

- Provide 5-inch diameter drain holes at every 1.4-meter interval along the gutter length.
- Necessary slope to be provided for the existing two 8-inch horizontal UPVC drain pipe to ensure proper water flow.

iv. Clause No:5.4 in Other Conditions.

- The payment shall be for the actual work carried out.


v. Clause No:5.5 in Flashing sheet Renewal.

- The existing flashing sheet in bay 4 side (near the Plate Yard Gantry Crane) has corroded, resulting in water ingress into the shed. The damaged flashing sheet shall be removed. A new flashing sheet of approximately 500 mm width, 38 m length, and 2 mm thickness shall be fabricated with necessary bending and installed in position to ensure proper sealing and prevention of water leakage.

3. Tender opening date;

<u>FOR</u>	<u>READ AS</u>
19 th December 2025 (Friday), 15:30hrs	22 nd December 2025 (Monday), 15:00hrs

4. All the other terms and conditions of the tender enquiry remains unchanged.

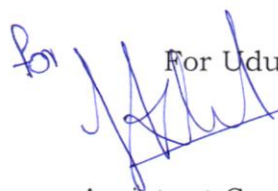

For Udupi Cochin Shipyard Limited,

Assistant General Manager (Contract Cell)

अखिल आर पी

AKHIL R P

प्रबंधक MANAGER

उडुपि कोचीन शिपयार्ड लिमिटेड

UDUPI COCHIN SHIPYARD LIMITED

माल्पे, कर्नाटक/MALPE, KARNATAKA-576 108